


# TIME MAKER Manual

Thanks for purchasing our product, please read the operating instruction below carefully before operate.

## Product introduction

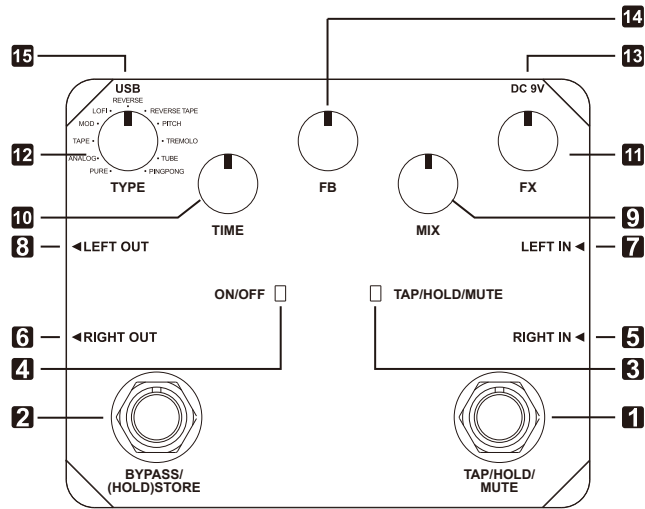


1. Right Footswitch
2. Left Footswitch
3. Mode state indicator  
(Green LED indicate TAP mode,  
red LED indicate HOLD mode)
4. Effect state indicator(ON/OFF)
5. Right input
6. Right output
7. Left input
8. Left output
9. Adjusts the ratio of original tone  
and effect tone
10. Delay time
12. 11 type of effects
13. DC9V( ⊕ ← ⊖ )
14. Feedback
15. USB audio device

11. The corresponding parameter of the effect

EFFECT TYPE	FX knob parameter
PURE	tone
ANALOG	tone
TAPE	tone
MOD	SPEED
LOFI	SAMPLERATE
REVERSE	tone
REVERSE TAPE	tone
PITCH	PITCH
TREMOLO	SPEED
TUBE	OVERDRIVE
PINGPONG	SPEED

## Product features

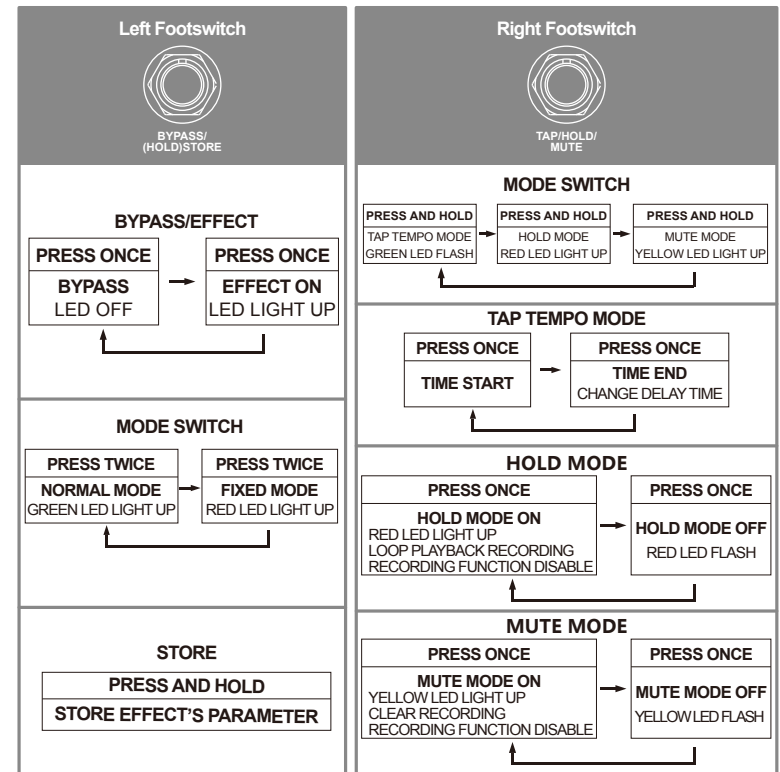

### ※ Introductions of USB Audio Decice Recording and Playing (Windows and Mac)

- ◆ Recording: Guitar → Twin Delay Pedal → USB Cable → The recording software in the computer
- ◆ Playing: Play Software → USB cable → Twin Delay Pedal → Amplifier


## Specifications

- ◆ Working Current: 165mA
- ◆ Dimensions: 116(D)\*90(W)\*35(H)mm
- ◆ Weight: 512g(With box)

# 双踏延迟单块 说明书

感谢您使用公司产品，在使用本产品之前请仔细阅读本说明书

## 产品介绍

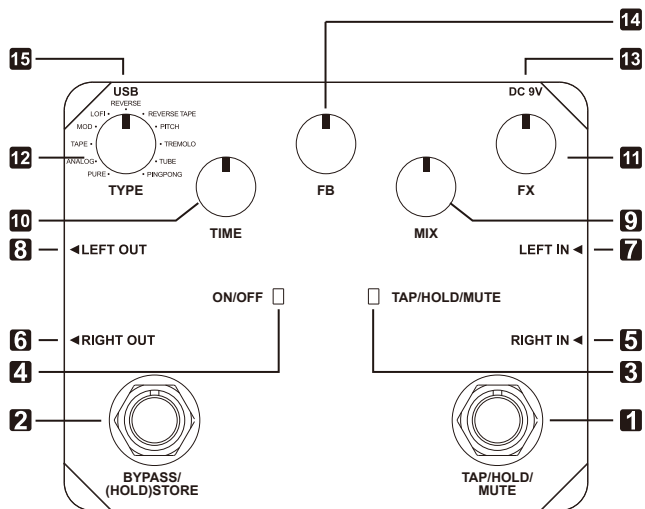


1. 右脚踏开关
2. 左脚踏开关
3. 效果状态指示灯(绿灯表示TAP模式, 红灯表示HOLD模式, 黄灯表示MUTE模式)
4. 效果状态指示灯(ON/OFF)
5. 右声道输入
6. 右声道输出
7. 左声道输入
8. 左声道输出
9. 效果声和原声混合比
10. 延迟时间
11. 11种效果类型
12. 9V直流电源(内负外正 ⊕ ← ⊖)
13. 反馈深度
14. USB声卡

### 11. 对应效果参数调节

效果类型	FX旋钮对应参数
PURE	tone
ANALOG	tone
TAPE	tone
MOD	speed
LOFI	sample rate
REVERSE	tone
REVERSE TAPE	tone
PITCH	pitch
TREMOLO	speed
TUBE	overdrive
PINGPONG	speed

## 操作说明

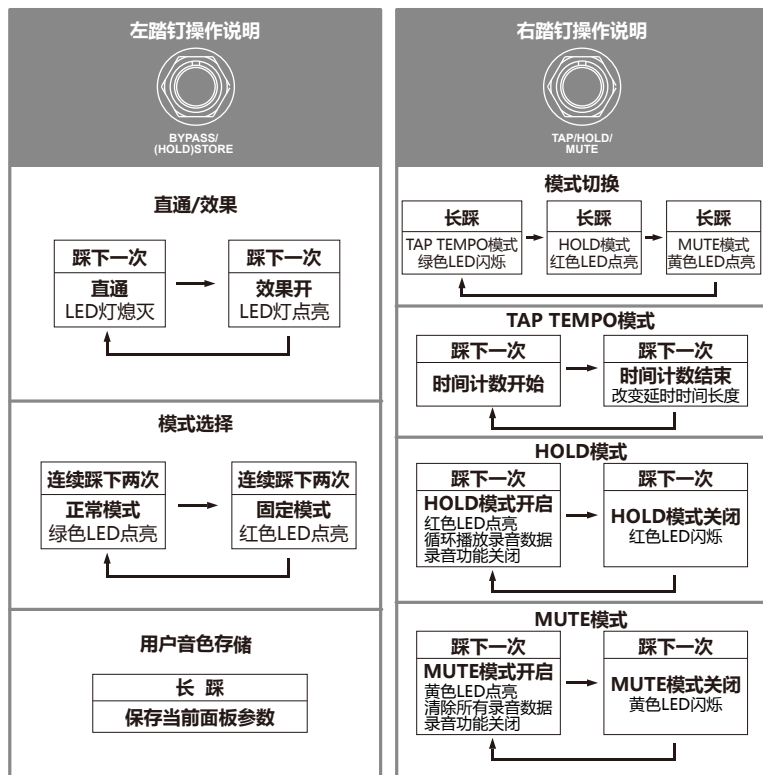

※关于USB声卡录音和播放操作说明(支持Windows和苹果系统)：

- ◆ 录单：吉它 → 双踏延迟(本产品) → USB线 → 电脑录音软件
- ◆ 播放：播放软件 → USB线 → 双踏延迟(本产品) → 音箱

## 技术参数

- ◆ 工作电流：165mA
- ◆ 尺寸：116(L)\*90(W)\*35(H)mm
- ◆ 重量：512克(带包装)